

GB810 - Twin Disc

STATUS

På lager

REF. NR.

GB810

MANUFACTURE

Twin Disc

TYPE

MG 509

RED.


1,45:1

FABRIKS NR.

Serial 594559 Spec. S-2595

REMARKS

oil capacity 2,8. 165 PSI

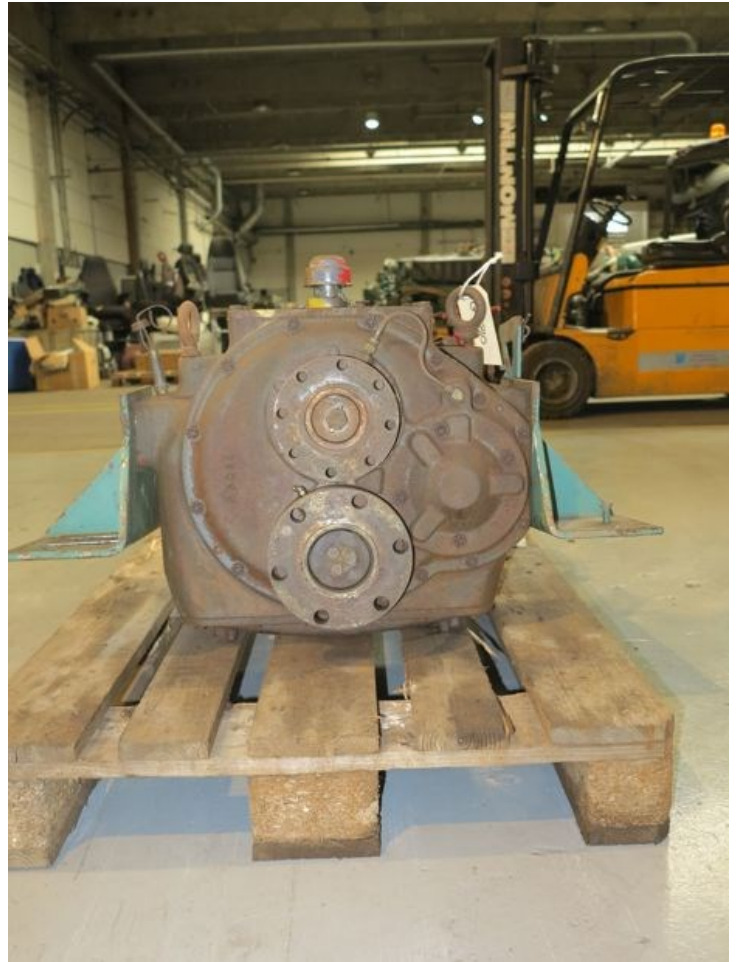





Model MG-509 Marine Transmission




- Oil controlled clutch engagement
- Carburized and hardened gears
- Emergency come-home feature
- Built with jig-bore accuracy
- Rubber block drive
- Ratios: 1.45:1, 2.00:1, 2.48:1, 2.95:1, 3.39:1, 3.83:1, 4.50:1 and 4.95:1
- Equipped with either SAE No. 1 or No. 2 housing
- Dry flywheel housing
- Both clutches removable with transmission attached to engine
- Identical performance and ratios forward or reverse
- Hydraulically-actuated and oil-cooled clutches shift with smooth, fast, fingertip response

The MG-509 Marine Transmission is the most popular marine transmission in its horsepower range. The 1.45:1, 2.00:1, 2.48:1, 2.95:1 and 3.39:1 ratio units are identical in design except for the size of the pinions and the countershaft gear. The 3.83:1, 4.50:1 and 4.95:1 ratio units use a deeper case as the center distance of the gears is greater. The carburized and hardened gears are made-to-order on anti-friction bearings on short, rigid shafts. The transmission may be purchased with an SAE No. 1 or No. 2 housing.

The driving rings are available with the No. 1 housing and one driving ring with the No. 2 housing. Maximum safe speed with Full No. 4-4914 driving ring is 2300 rpm. The MG-509 is designed for full horsepower operation continuously in either forward or reverse position.


An externally-mounted heat exchanger, top-mounted power take-off, a mating propeller shaft coupling flange and a trolling valve assembly are available as optional equipment with the MG-509 Marine Transmission. The

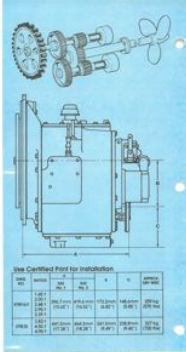

Use Certified Print for Installation

DWG NO.	RATIOS	A	B	C	APPROX. DRY WT.	
X9816-F	1.45:1 2.00:1 2.48:1 2.95:1 3.39:1	396.7 mm (15.62")	419.6 mm (16.52")	173.2 mm (6.82")	148.6 mm (5.85")	259 kg (570 lbs)
X9835	3.83:1 4.50:1 4.95:1	441.5 mm (17.38")	464.3 mm (18.28")	241.0 mm (9.49")	238.8 mm (9.40")	327 kg (720 lbs)

trolling valve is applicable to both right-hand and left-hand rotation engines turning either right-hand or left-hand propellers.

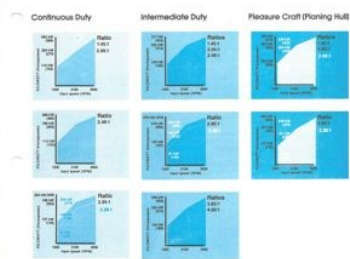

IMPORTANT NOTICE
Engaging propellers (which for standard compatibility could cause damage to components of the drive) from resulting in loss of mobility. At maximum, impact, incompatibility could result in gear chatter or the shafts.

The responsibility for ensuring that the torsional compatibility of the propulsion system is satisfactory rests with the assembler of the drive and drive equipment.

Torsional vibration analysis can be made in the engine distributor's marine engine controls, independent consultants and others. Twin Disc's responsibility is to provide solutions to potential torsional problems that relate to the marine transmission.

For Service Classification Definitions see book cover

Model MG-509 Marine Transmission

- Oil controlled clutch engagement
- Carburized and hardened gears
- Emergency come-home feature
- Built with jig-bore accuracy
- Rubber block drive
- Ratios: 1.45:1, 2.00:1, 2.48:1, 2.95:1, 3.39:1, 3.83:1, 4.50:1 and 4.95:1
- Equipped with either SAE No. 1 or No. 2 housing
- Dry flywheel housing
- Both clutches removable with transmission attached to engine
- Identical performance and ratios forward or reverse
- Hydraulically-actuated and oil-cooled clutches shift with smooth, fast, fingertip response

The MG-509 Marine Transmission is the most popular marine transmission in its horsepower range. The 1.45:1, 2.00:1, 2.48:1, 2.95:1 and 3.39:1 ratio units are identical in design except for the size of the pinions and the countershaft gear. The 3.83:1, 4.50:1 and 4.95:1 ratio units use a deeper case as the center distance of the gears is greater. The carburized and hardened gears are made-to-order on anti-friction bearings on short, rigid shafts. The transmission may be purchased with an SAE No. 1 or No. 2 housing.

Three driving rings are available with the No. 1 housing and one driving ring with the No. 2 housing. Maximum safe speed with Full No. 4-4914 driving ring is 2300 rpm. The MG-509 is designed for full horsepower operation continuously in either forward or reverse position.

An externally-mounted heat exchanger, top-mounted power take-off, a mating propeller shaft coupling flange and a trolling valve assembly are available as optional equipment with the MG-509 Marine Transmission. The

trolling valve is applicable to both right-hand and left-hand rotation engines turning either right-hand or left-hand propellers.

Heat Exchanger

Kits available from Twin Disc consist of a heat exchanger with flexible hoses and necessary fittings for installation on the top cover plate of the transmission. Customers who wish to furnish their own heat exchanger should contact the nearest Twin Disc or marine engine distributor. When ordering, specify if raw or fresh water is to be used in the heat exchanger. Heat exchanger can be remotely-mounted if a top PTO is used.

Use Certified Print for Installation

DWG NO.	RATIOS	A	B	C	APPROX. DRY WT.	
X9816-F	1.45:1 2.00:1 2.48:1 2.95:1 3.39:1	396.7 mm (15.62")	419.6 mm (16.52")	173.2 mm (6.82")	148.6 mm (5.85")	259 kg (570 lbs)
X9835	3.83:1 4.50:1 4.95:1	441.5 mm (17.38")	464.3 mm (18.28")	241.0 mm (9.49")	238.8 mm (9.40")	327 kg (720 lbs)

Model MG-509 Marine Transmission



- Oil controlled clutch engagement
- Carburized and hardened gears
- Emergency come-home feature
- Built with jig-bore accuracy
- Rubber block drive
- Ratios: 1.45:1, 2.00:1, 2.48:1, 2.95:1, 3.39:1, 3.83:1, 4.50:1 and 4.95:1
- Equipped with either SAE No. 1 or No. 2 housing
- Dry flywheel housing
- Both clutches removable with transmission attached to engine
- Identical performance and ratios forward or reverse
- Hydraulically-actuated and oil-cooled clutches shift with smooth, fast, fingertip response

The MG-509 Marine Transmission is the most popular marine transmission in its horsepower range.

The 1.45:1, 2.00:1, 2.48:1, 2.95:1 and 3.39:1 ratio units are identical in design except for the size of the pinions and the countershaft gear. The 3.83:1, 4.50:1 and 4.95:1 ratio units use a deeper case as the center distance of the gears is greater. The carburized and hardened gears are made-to-order on anti-friction bearings on short, rigid shafts. The transmission may be purchased with an SAE No. 1 or No. 2 housing.

Three driving rings are available with the No. 1 housing and one driving ring with the No. 2 housing. Maximum safe speed with Full No. 4-4914 driving ring is 2300 rpm. The MG-509 is designed for full horsepower operation continuously in either forward or reverse position.

An externally-mounted heat exchanger, top-mounted power take-off, a mating propeller shaft coupling flange and a trolling valve assembly are available as optional equipment with the MG-509 Marine Transmission. The

Model MG-509 Marine Transmission

- Oil controlled clutch engagement
- Carburized and hardened gears
- Emergency come-home feature
- Built with jig-bore accuracy
- Rubber block drive
- Ratios: 1.45:1, 2.00:1, 2.48:1, 2.95:1, 3.39:1, 3.83:1, 4.50:1 and 4.95:1
- Equipped with either SAE No. 1 or No. 2 housing
- Dry flywheel housing
- Both clutches removable with transmission attached to engine
- Identical performance and ratios forward or reverse
- Hydraulically-actuated and oil-cooled clutches shift with smooth, fast, fingertip response

The MG-509 Marine Transmission is the most popular marine transmission in its horsepower range. The 1.45:1, 2.00:1, 2.48:1, 2.95:1 and 3.39:1 ratio units are identical in design except for the size of the pinions and the countershaft gear. The 3.83:1, 4.50:1 and 4.95:1 ratio units use a deeper case as the center distance of the gears is greater. The carburized and hardened gears are made-to-order on anti-friction bearings on short, rigid shafts. The transmission may be purchased with an SAE No. 1 or No. 2 housing.

Three driving rings are available with the No. 1 housing and one driving ring with the No. 2 housing. Maximum safe speed with Full No. 4-4914 driving ring is 2300 rpm. The MG-509 is designed for full horsepower operation continuously in either forward or reverse position.

An externally-mounted heat exchanger, top-mounted power take-off, a mating propeller shaft coupling flange and a trolling valve assembly are available as optional equipment with the MG-509 Marine Transmission. The

trolling valve is applicable to both right-hand and left-hand rotation engines turning either right-hand or left-hand propellers.

Heat Exchanger

Kits available from Twin Disc consist of a heat exchanger with flexible hoses and necessary fittings for installation on the top cover plate of the transmission. Customers who wish to furnish their own heat exchanger should contact the nearest Twin Disc or marine engine distributor. When ordering, specify if raw or fresh water is to be used in the heat exchanger. Heat exchanger can be remotely-mounted if a top PTO is used.

Use Certified Print for Installation

DWG NO.	RATIOS	A	B	C	APPROX. DRY WT.	
X9816-F	1.45:1 2.00:1 2.48:1 2.95:1 3.39:1	396.7 mm (15.62")	419.6 mm (16.52")	173.2 mm (6.82")	148.6 mm (5.85")	259 kg (570 lbs)
X9835	3.83:1 4.50:1 4.95:1	441.5 mm (17.38")	464.3 mm (18.28")	241.0 mm (9.49")	238.8 mm (9.40")	327 kg (720 lbs)

trolling valve is applicable to both right-hand and left-hand rotation engines turning either right-hand or left-hand propellers.

Heat Exchanger

Kits available from Twin Disc consist of a heat exchanger with flexible hoses and necessary fittings for installation on the top cover plate of the transmission. Customers who wish to furnish their own heat exchanger should contact the nearest Twin Disc or marine engine distributor. When ordering, specify if raw or fresh water is to be used in the heat exchanger. Heat exchanger can be remotely-mounted if a top PTO is used.