

GR201 - Asea

STATUS

På lager

REF. NR.

GR201

MANUFACTURE

Asea

TYPE

GAC30-41

VOLT

390

KVA

207

RPM

1500

HZ



50

FABRIKS NR.

6577902

AMP

306

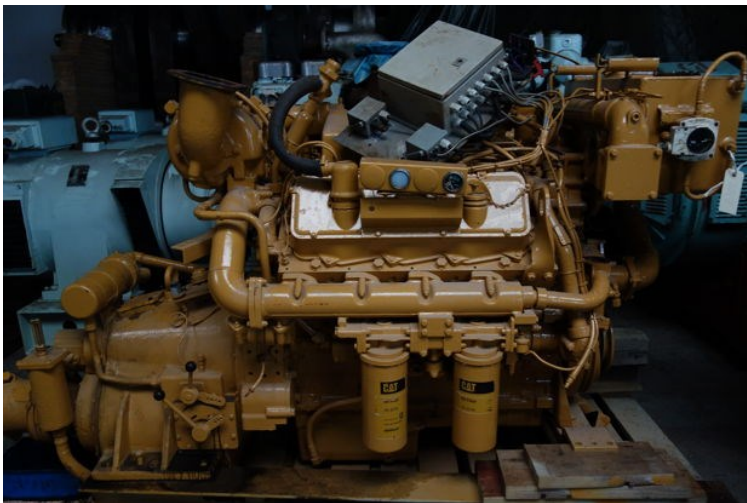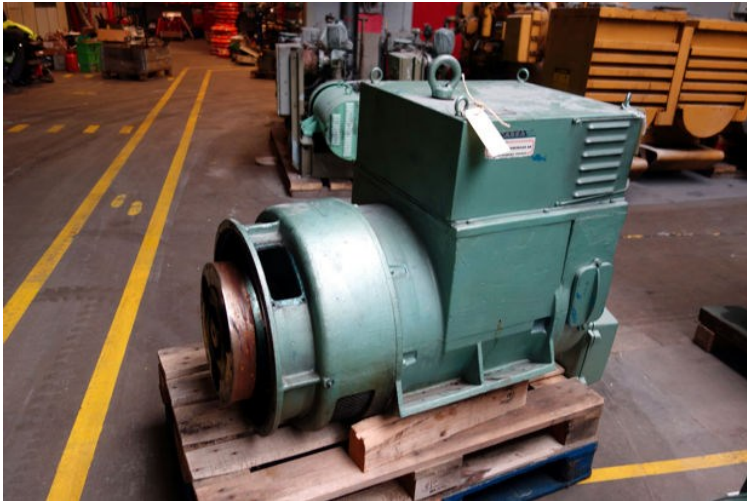

VÄRME

220

V

200

W

ASEA

Gen. 3 ~ 50 Hz	IEC 34-1
GAC 30-41	No. 6577 902
207 kVA x 0.8	1500 r/min
	Class: Stator F Rotor F
390 V Y	306 A
Exc. -55 V	Exc. 43 A
at. No.	IP 23S 990 kg

MADE IN SWEDEN

FABRIQUE EN SUÈDE

SMORJ vid första start tills fett tränger ut ur fettutloppet. Torka nippelarna rena!
LUBRICATE at first start until grease is forced out of the outlet. Clean the nipples!

SMORJ under drift varje lager med kullagerfett. LUBRICATE when running with ball bearing grease.

Fettmängd per lager Quantity per bearing	Drift Service	Smörjintervall Lubric. interval
60 g	8 h	12 mån. month
	24 h	6 mån. month