

Azcue - BT/LV 100T 01 no plate

STATUS

På lager

REF. NR.

LP250

MANUFACTURE

Azcue

TYPE

BT/LV 100T 01 no plate

REMARKS

ABB motor. 22/25 kW, 50/60 Hz, 980/1180 rpm, 440 volt



PDF

[bt-lh_lv_datasheet-min](#)

PDF

[btlv_instruction_manual](#)



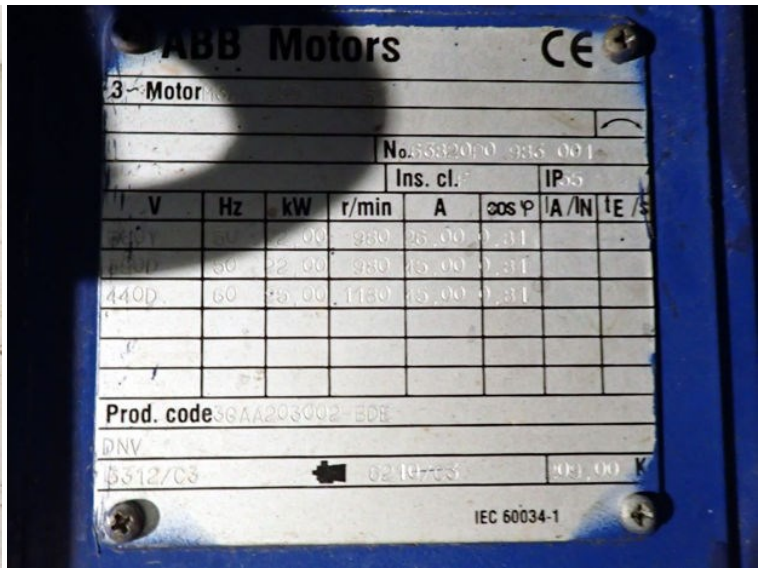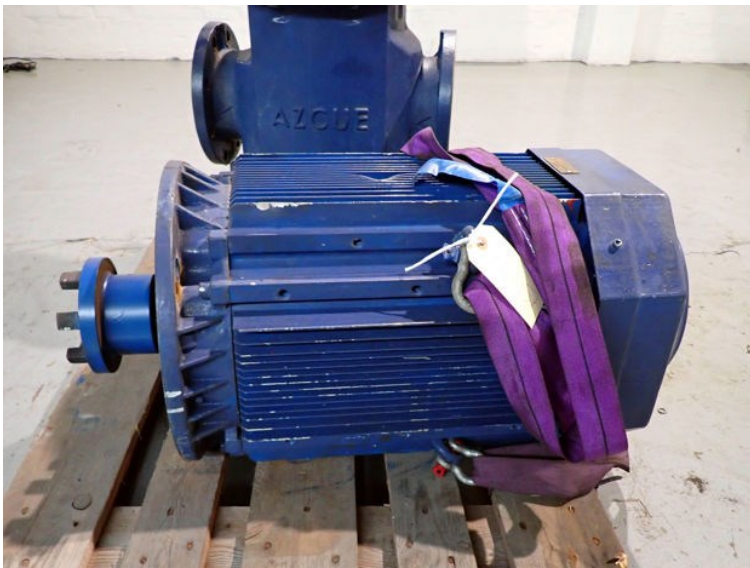



Dimensiones Dimensions Dimensions

Tipo / Type BT-LV

N. 776-LV80125

Azcue BT/LV 100T 01

Bomba / Pump	Tipo / Type	Motor / Moteur											DN	DN2	a	kg (a)			
		R.p.m. / 1/min.	a	b	c	d	e	f	g	h	k	m					r	s	t
LV MT HT	100T	1.1	2.2	3.3	4.4	5.5	6.6	7.7	8.8	9.9	11.0	13.2	15.4	17.6	20.0	225	250	275	300
	100T	2.2	3.3	4.4	5.5	6.6	7.7	8.8	9.9	11.0	13.2	15.4	17.6	20.0	225	250	275	300	
	100T	3.3	4.4	5.5	6.6	7.7	8.8	9.9	11.0	13.2	15.4	17.6	20.0	225	250	275	300		
	100T	4.4	5.5	6.6	7.7	8.8	9.9	11.0	13.2	15.4	17.6	20.0	225	250	275	300			
	100T	5.5	6.6	7.7	8.8	9.9	11.0	13.2	15.4	17.6	20.0	225	250	275	300				
	100T	6.6	7.7	8.8	9.9	11.0	13.2	15.4	17.6	20.0	225	250	275	300					
	100T	7.7	8.8	9.9	11.0	13.2	15.4	17.6	20.0	225	250	275	300						
	100T	8.8	9.9	11.0	13.2	15.4	17.6	20.0	225	250	275	300							
	100T	11.0	13.2	15.4	17.6	20.0	225	250	275	300									
	100T	13.2	15.4	17.6	20.0	225	250	275	300										
	100T	15.4	17.6	20.0	225	250	275	300											
	100T	17.6	20.0	225	250	275	300												
LV 12HT	100T	1.1	2.2	3.3	4.4	5.5	6.6	7.7	8.8	9.9	11.0	13.2	15.4	17.6	20.0	225	250	275	300
	100T	2.2	3.3	4.4	5.5	6.6	7.7	8.8	9.9	11.0	13.2	15.4	17.6	20.0	225	250	275	300	
	100T	3.3	4.4	5.5	6.6	7.7	8.8	9.9	11.0	13.2	15.4	17.6	20.0	225	250	275	300		
	100T	4.4	5.5	6.6	7.7	8.8	9.9	11.0	13.2	15.4	17.6	20.0	225	250	275	300			
	100T	5.5	6.6	7.7	8.8	9.9	11.0	13.2	15.4	17.6	20.0	225	250	275	300				
	100T	6.6	7.7	8.8	9.9	11.0	13.2	15.4	17.6	20.0	225	250	275	300					
	100T	7.7	8.8	9.9	11.0	13.2	15.4	17.6	20.0	225	250	275	300						
	100T	8.8	9.9	11.0	13.2	15.4	17.6	20.0	225	250	275	300							
	100T	11.0	13.2	15.4	17.6	20.0	225	250	275	300									
	100T	13.2	15.4	17.6	20.0	225	250	275	300										
	100T	15.4	17.6	20.0	225	250	275	300											
	100T	17.6	20.0	225	250	275	300												

Sujeto a cambios / Subject to alterations / Sujet a des modifications

En el peso indicado no está incluido el motor
The stated weight does not include the motor
Le poids total indiqué n'inclut pas le moteur

(1) Conexión vacuómetro.
Vacuometer connection.
Conexión vacuómetro.

(2) Conexión manómetro.
Manometer connection.
Conexión manómetro.

DIN 2501, Pa10/16

DN	125	150	200
K ⁿ	210	240	295
D ⁿ	250	285	340
N ⁿ	8	8	8
d	18	22	22

Pa16 Pa10

www.northridgepumps.com

Bombas Azcue UK Supplier

bombas-azcue

Supplier of Azcue pumps and spares to the UK and International

Azcue BT-LV Vertical Triple Screw Pump

Vertical self priming long coupled triple screw pumps.
Designed for pumping lubricant media and gasoil, diesel, fuel transfer and feed applications.

Flow rates up to 200m³/hr
Head up to 10bar
Port sizes range from DN 125mm to 200mm
Temperature up to +160°C
Available in Cast Iron GG-25 and Ductile Cast Iron GGG40 (Versions MT/HT).

Azcue BT-LV Pump model numbers:
BT-LV80, BT-LV90, BT-LV100, BT-LV110, BT-LV125

For price and technical information, please contact us at sales@bombas-azcue.co.uk

1/1