

Installation (ship):	M2560	Engine type/No:	4AXAG	Var:	3AX-2000PS1
ID No :	10	Temperature (°C):	9	Engine running hours:	

Remarks: The liner is measured directly when it's removed from engine.

Cylinder Liner

The measures show 1/100 mm above / under basic measure (300)


Max. wear cylinder liner: X = 301

Max. wear cylinder liner: Y and Z = 300,6

Ovality max.: X = 0.35

Ovality max.: Y and Z = 0.20

AX/AXG	AXA/AXAG
E = 65	E = 40
X = 86	X = 60
Y = 150	Y = 124
Z = 300	Z = 274

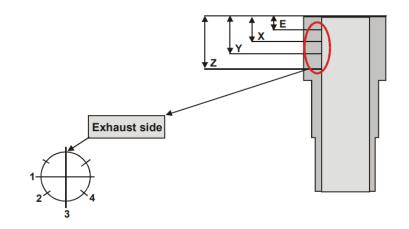

Measurements point	E-measures			X-measures			Y-measures			Z-measures				
	1	3	1	2	3	4	1	2	3	4	1	2	3	4
Measurements	29	42	42	40	45	41	40	40	44	40	35	37	41	40

Measurements		Average waer		Maxium ovality			
point	X-measures	Y-measures	Z-measures	X-measures	Y-measures	Z-measures	
Measurements	42	44	38,25	03	04	06	

Date of measurement: 11-03 2025 Place: Grenaa Name: Danni Pallisgaard



























