


MAXIMUM 895 KW (1200 HP) @ 2300 RPM [PLEASURE CRAFT]**STANDARD EQUIPMENT****MGX-5135 SC & MGX-5135 A**

SAE J617 housing no. 1
 Flexible coupling for 14" flywheel (SAE J620 size 355)
 Electric GP-valve with manual override
 Profile module – interface for engagement signals
 Oil strainer and oil filter

MGX-5135 RV

Input flange size GWB 587.50
 Electric GP-valve with manual override
 Profile module – interface for engagement signals
 Oil strainer and oil filter

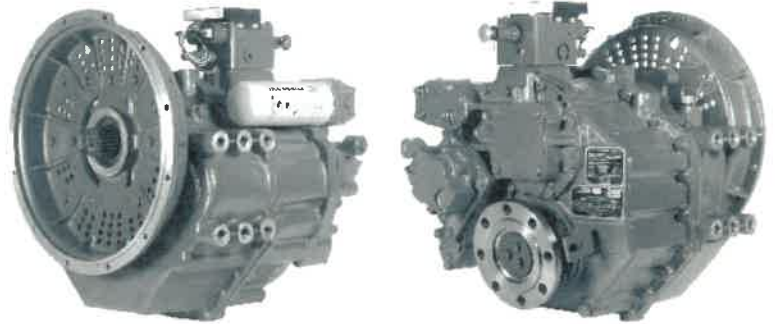

QUICKSHIFT®
You've got to feel it to believe it.

OPTIONS

	MGX-5135 SC	MGX-5135 A	MGX-5135 RV
SAE J617 housing no. 0	X	X	
Flexible coupling for 18" flywheel (SAE J620 size 460)	X	X	
E-Troll module – interface for engagement & trolling signals	X	X	X
Oil cooler with thermostatic bypass valve	X	X	X
Companion flange/bolt set	X	X	X
Monitoring devices to customer's specification	X	X	X
Mounting brackets	X	X	X
Live PTO – max. 593 Nm			
SAE J744 size 127-4, 32-4 (SAE "C", 4-bolt)	X	X	X
Hydraulic Clutchable PTO – max. 641 Nm			
SAE J744 size 127-4, 32-4 (SAE "C", 4-bolt)	X	X	
Hydraulic Clutchable PTO – max. 641 Nm			
Shaft with key	X	X	
Weight (dry weight with Standard Equipment)	300 kg	280 kg	258 kg

Contact Twin Disc for Survey Society Approvals and Classifications.

Specifications subject to change without prior notice in the interest of continual product improvement.

INPUT RATINGS – KILOWATTS (KW) (HORSEPOWER [HP])*

MGX-5135 SC	Reduction Ratios :1	Pleasure Craft @2300 RPM	Light Duty @2300 RPM	Intermediate @2100 RPM	Medium Duty @1800 RPM	Continuous duty @1800 RPM	Input speed limits RPM
	1.00, 1.28, 1.48, 1.73, 2.04	895 kW (1200 hp)	746 kW (1000 hp)	560 kW (751 hp)	485 kW (650 hp)	445 kW (597 hp)	450 MIN./2800 MAX.
	2.57	820 kW (1100 hp)	716 kW (960 hp)				
	3.00	746 kW (1000 hp)	671 kW (900 hp)	522 kW (700 hp)	448 kW (601 hp)	408 kW (547 hp)	

MGX-5135 A & MGX-5135 RV	Reduction Ratios :1	Pleasure Craft @2300 RPM	Light Duty @2300 RPM	Intermediate @2100 RPM	Medium Duty @1800 RPM	Continuous duty @1800 RPM	Input speed limits RPM
	1.10, 1.25, 1.53, 1.79, 2.00	895 kW (1200 hp)	746 kW (1000 hp)	560 kW (751 hp)	485 kW (650 hp)	445 kW (597 hp)	450 MIN./2800 MAX.
	2.52	820 kW (1100 hp)	716 kW (960 hp)				

* Ratings shown for use with standard right hand rotation engines.