


<b>STATUS</b>	På lager
<b>REF. NR.</b>	HS283
<b>PUMP MANUFACTURE /TYPE</b>	Casappa PLP 20-16-D
<b>PUMP PRES.</b>	260 bar
<b>DISPLACEMENT (CM3/R)</b>	16,85
<b>PUMP FLOW (L/MIN.)</b>	24,6
<b>ELECTRONIC MOTORS MANUFACTURE</b>	Marelli Motori
<b>ELECTRONIC MOTORS KW</b>	11
<b>ELECTRONIC MOTORS VOLT</b>	400
<b>ELECTRONIC MOTORS HZ</b>	50
<b>ELECTRONIC MOTORS RPM</b>	1460
<b>TANK DIMENSION (CM) L</b>	60
<b>TANK DIMENSION (CM) W</b>	45
<b>TANK DIMENSION (CM) H</b>	40
<b>REMARKS</b>	Svendborg Hydraulik Type SH100
<b>PDF</b>	<a href="#">plp10</a>



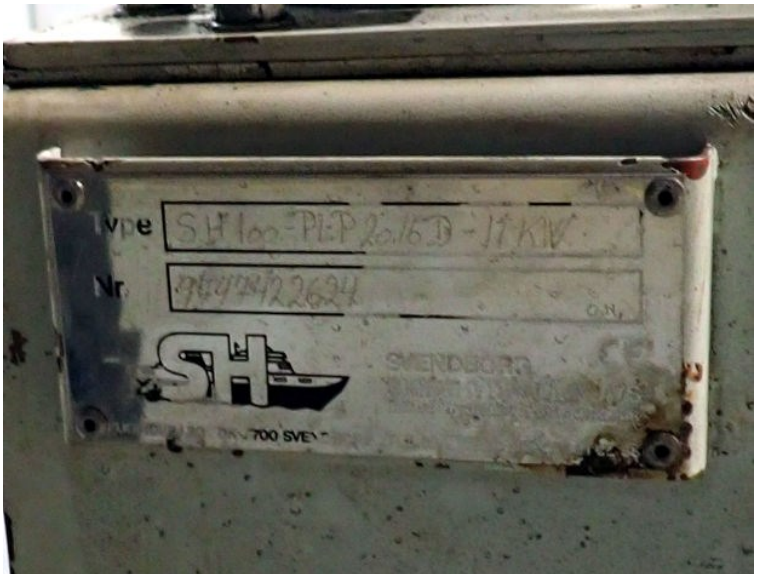

CASAPPA  
POLARS

PLP 20-16-D 25.3k Vmax 250 Bar

GENERAL DATA PUMPS AND MOTORS

Series	Pump type PLP Motor type PLM	Displacement in³/rev (cm³/rev)	Max. pressure			Max. speed	Min. speed
			P <sub>1</sub>	P <sub>2</sub>	P <sub>3</sub>		
POLARS 10	PL 10-1	0.07 (1.07)	3770 (280)	4060 (280)	4205 (290)	4000	650
	PL 10-1.5	0.10 (1.6)	3770 (280)	4060 (280)	4205 (290)	4000	650
	PL 10-2	0.13 (2.13)	3770 (280)	4060 (280)	4205 (290)	4000	650
	PL 10-2.5	0.16 (2.67)	3770 (280)	4060 (280)	4205 (290)	4000	650
	PL 10-3	0.20 (3.34)	3770 (280)	4060 (280)	4205 (290)	4000	650
	PL 10-4	0.26 (4.27)	3625 (250)	3915 (270)	4060 (280)	4000	650
	PL 10-5	0.33 (5.34)	3625 (250)	3915 (270)	4060 (280)	4000	650
	PL 10-5.8	0.38 (6.20)	3335 (230)	3625 (250)	3770 (280)	3500	650
	PL 10-6.3	0.41 (6.67)	3335 (230)	3625 (250)	3770 (280)	3500	650
	PL 10-8	0.52 (8.51)	2610 (180)	2900 (200)	3045 (210)	3500	650
PL 10-10	0.65 (10.67)	2030 (140)	2320 (160)	2465 (170)	3500	650	
POLARS 20	PL 20-4	0.30 (4.95)	3625 (250)	4060 (280)	4350 (300)	4000	600
	PL 20-5	0.40 (6.51)	3625 (250)	4060 (280)	4350 (300)	4000	600
	PL 20-7.2	0.44 (7.26)	3625 (250)	4060 (280)	4350 (300)	4000	600
	PL 20-8	0.50 (8.26)	3625 (250)	4060 (280)	4350 (300)	3500	600
	PL 20-9	0.56 (9.17)	3625 (250)	4060 (280)	4350 (300)	3500	600
	PL 20-10	0.66 (10.9)	3625 (250)	4060 (280)	4350 (300)	3500	600
	PL 20-11.2	0.69 (11.23)	3625 (250)	4060 (280)	4350 (300)	3500	600
	PL 20-14	0.89 (14.53)	3625 (250)	4060 (280)	4350 (300)	3500	500
	PL 20-15	1.03 (16.85)	3625 (250)	4060 (280)	4350 (300)	3000	500
	PL 20-15	1.16 (19.09)	2900 (200)	3190 (220)	3480 (240)	3000	500
PL 20-19	1.59 (25.14)	2900 (200)	3190 (220)	3480 (240)	3000	500	
PL 20-24.5	1.52 (24.84)	2465 (170)	2755 (190)	3045 (210)	2500	500	
PL 20-25	1.61 (26.42)	2465 (170)	2755 (190)	3045 (210)	2500	500	
PL 20-27.8	1.72 (28.21)	1885 (130)	2175 (150)	2465 (170)	2000	500	
PL 20-31.5	2.01 (33.03)	1885 (130)	2175 (150)	2465 (170)	2000	500	
PL 30-2	1.34 (21.99)	3625 (250)	3915 (270)	4060 (280)	3000	350	
PL 30-27	1.63 (26.70)	3625 (250)	3915 (270)	4060 (280)	3000	350	
PL 30-34	2.11 (34.55)	3480 (240)	3770 (280)	3915 (270)	3000	350	

107k  
Rampa.